

SB 1200 SPECIALTY BEVERAGE STATION



The Franke Specialty Beverage Station is customizable for your business. It allows you to increase speed of service and offers modularity to fit within your back-of-house operational layout. The SB 1200 works even harder for you, with greater milk capacity and under the counter, automated cleaning.

SB1200

- 12.1" touch screen
- 2 grinders, 2 x 2.6 lbs whole bean hoppers
- iQFlow™
- Single spout (automatic height adjustment 3-7 in)
- Combi-Dispenser System, Single Spout
- Cup detection
- CleanMaster module can be optionally mounted on rear of refrigerator for added counter space.



CLEANMASTER

Fully automatic cleaning process meeting highest hygiene standards requiring significantly less labor from employees.



iQFlow™

The groundbreaking technology that extracts more flavor for unrivaled in-cup-quality.



TOUCH SCREEN

Intuitive 12.1" display provides employees greater visibility to quickly and easily serve customers delicious beverages on demand.



FRANKE DIGITAL SERVICES

Manage your coffee machine fleet remotely and operate more efficiently with a customized dashboard for your operations.


FRANKE

MAKE IT WONDERFUL

TECHNICAL DATA

MACHINE

MODEL	SB 1200
Electrical Connection	208V (30 A)
Dimensions	13.4 in / 33.5 in / 23.6 in (W/H/D)
Weight (empty)	128 lbs
Color	Black

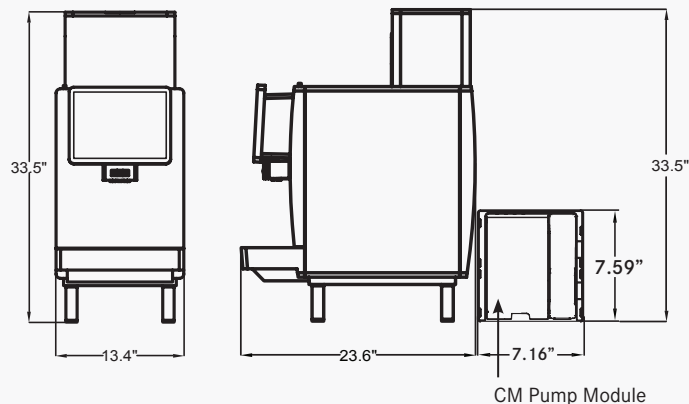

CLEANMASTER UNIT

MODEL	CM PUMP MODULE
Electrical connection	115 V, 1L N PE, 50-60 Hz 15.5 in /
Dimensions	7.59 in / 7.16 in (W/H/D) approx.
Weight (empty)	5.5-8.8 lbs
Colors	Black

MUT UNIT


MUT is installed in a worktop refrigerator (sold separately) under the machine to dispense bulk milk options and increase counter space.

WATER QUALITY

Aroma	Fresh and pure taste, with no perceptible aroma
Color	Clear
Total Hardness	70 – 140 ppm (mg/l)
Carbonate hardness	3 – 6° dH CH (carbonate hardness) 50 – 105 ppm (mg/l)
Acid content/ph value	6.5 – 7.5 pH
Chlorine content	< 0.5 mg/l
Chloride content	< 30 mg/l
TDS	30 – 150 ppm (mg/l)
(Total dissolved solids)	
Electrical conductivity	50 – 200 µS/cm (microsiemens)
Iron Content	< 0.3 mg/l
Water pressure	80 – 800 kPa (0.8 – 8 bar)
Flow rate	> 0.1 l/sec
Water temperature	< 25°C

WATER CONNECTION AND DRAIN

Water connection	3/8" compression fitting with shut off valve, L = 59 in
Drain hose	2x Dia = 0.75 in, L = 78.7 in

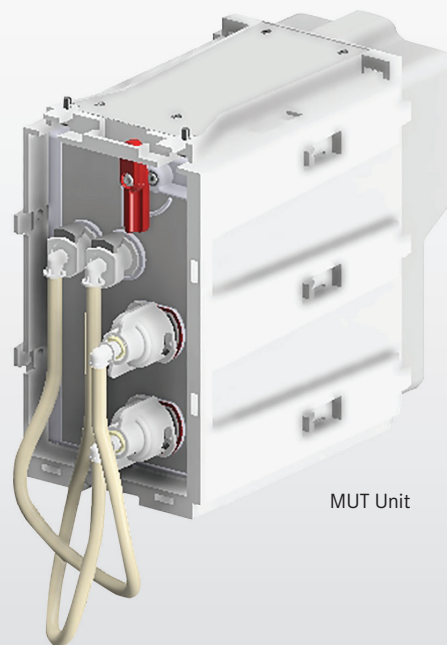

MUT Unit



Franke Coffee Systems Americas
cs-coffeesales.us@franke.com

coffee.franke.com

MAKE IT WONDERFUL