

Daily Cleaning – Espresso Machine, SB1200



Why: To ensure proper operation of the machine as well as optimal drink quality

Time Required: 3-5 minutes to prepare, 15 minutes to complete

Time of day: Between 5AM – 8AM.

Start cleaning via the **Cleaning and Maintenance menu**

No need to let the machine cool before cleaning

Tools needed: Long Handled Brush, Cleaning Brush Kit, Spout Cleaning Device

Supplies needed: Cleaning for Franke Espresso Machine Tablets, Paper Towels

Tools & Supplies Needed:

- CIP Cleaner: WRIN-12943-011;Part #154450
- Cleaning Tablets: Part #154430
- Long Handled Brush: Part #151044
- Cleaning Brush Kit: Part #27023398
- Spout Cleaning Device: Part #1561566

Items can be ordered through the DC, KES and directly with Franke Coffee Systems




1) Tap the McCafe logo in the top left corner of the screen.




2) Enter the PIN code 1111 and tap **OK**



3) Tap **Cleaning and maintenance**

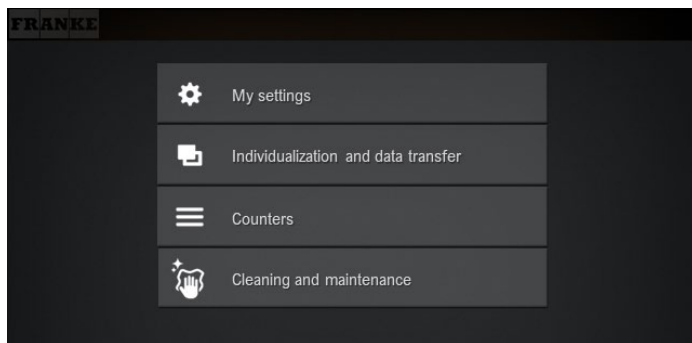

4) Tap **Clean System**, then tap **Start**. Confirm by tapping **Yes** when prompted to start the cleaning process.

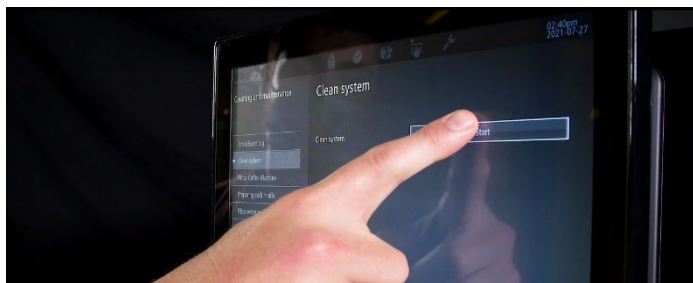

5) When prompted, **open** the cooler door, **disconnect** the milk pick up tube from the bag and **connect** the milk pick up tube into the cleaning port of the milk pump module. Close the cooler door. The system confirms that the milk pick-up tube is properly connected.



6) When prompted, open the SB1200 door and use the long-handled brush and multi-brush set to sweep the brew piston screen and sides of the brew piston to remove any visible grounds.




7) Empty the grounds bin and take to 3-compartment sink. Wash in SolidSense All-Purpose Super Concentrate, rinse in clean water and sanitize in SolidSense Sanitizer solution for 1 minute. Dry the grounds bin with a paper towel.



8) Before re-inserting the grounds bin, use the long-handled brush to sweep away any grounds that have fallen on the bottom of the machine and discard in the trash.



9) Remove the drip tray grill and take to the 3-compartment sink. Wash in SolidSense All-Purpose Super Concentrate, rinse in clean water and sanitize in SolidSense Sanitizer solution for 1 minute. Use a clean, sanitizer-soaked towel to clean drip tray. Re-install the drip tray grill.

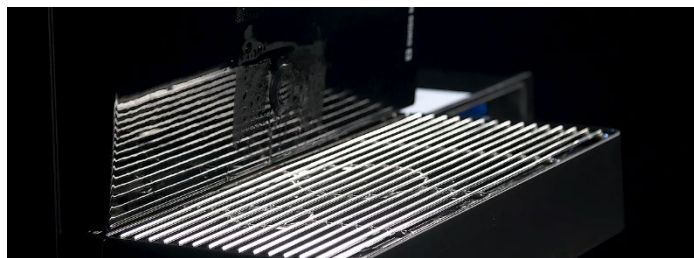

10) Re-insert the grounds bin and close door.




11) When prompted, put the spout cleaning device under the spout.



12) Open the cleaning tablet chute door and insert a cleaning tablet (Cleaning for Franke Espresso Machine 100 per bottle). Close the cleaning tablet chute door. Tap Next on the screen.



13) The cleaning cycle will proceed automatically.

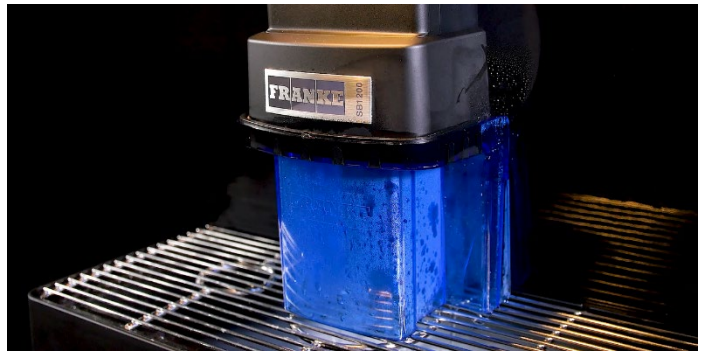


14) When prompted, remove the spout cleaning device. Any liquid in the top of the cleaning device, discard in the drip tray



15) Open the cooler door. Disconnect the milk pick up tube from the cleaning port of the milk pump module and reconnect to the milk bag. Close the cooler door.



16) When prompted, tap yes/next to prime the milk pump module.

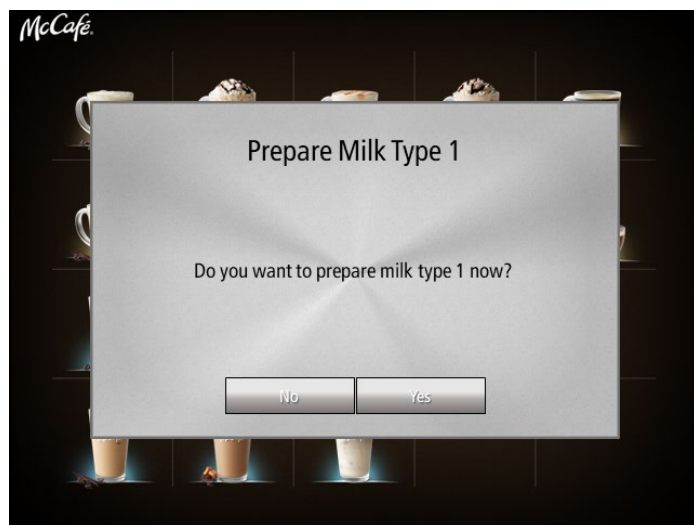

Cleaning the screen – Espresso Machine, SB1200

FRANKE

17) Tap the McCafe' logo at the top left of the screen.




18) Enter the PIN code 1111 and tap **OK**




19) Select Cleaning and Maintenance, then select Wipe Protection.

The user interface is locked for 20 seconds.

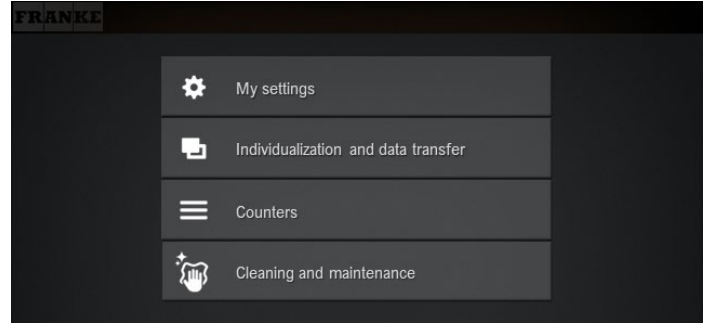

20) Clean the surface with a clean, sanitizer-soaked towel.

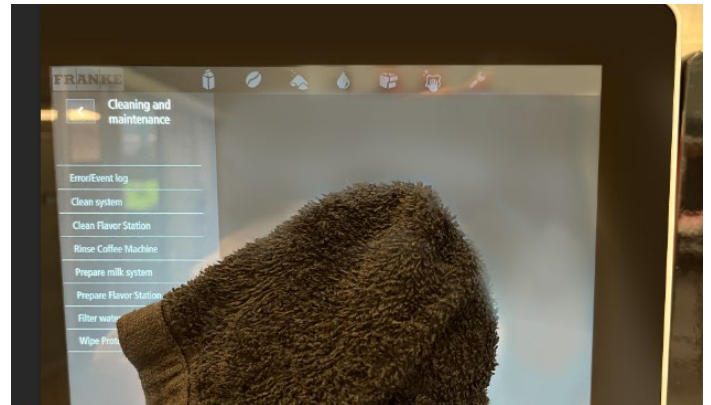

END

Weekly Cleaning – Espresso Machine, SB1200



Cleaning the coffee bean hopper

- Use a paper towel only.
- Do not use any cleaning products as these alter the taste of the coffee.
- The hopper will not need to be cleaned using cleaning products




1) Open the SB1200 door, pull the red locking slide towards the front.



2) Remove the bean hopper



3) Empty the bean hopper, discarding the remaining beans and use a dry paper towel to remove coffee oils & residue from the inside of the coffee bean hopper. Wipe the inside of the cover of the coffee bean hopper as well.

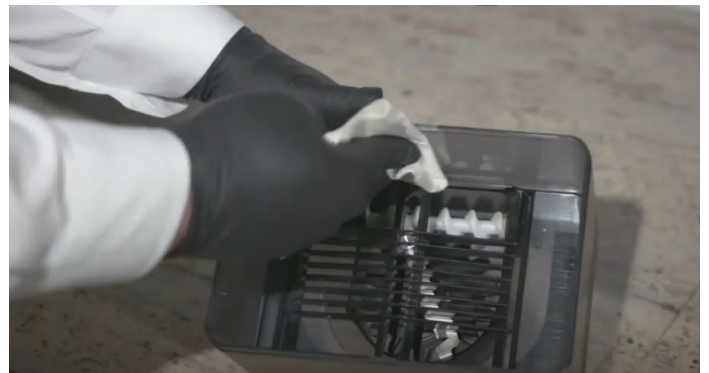


4) Replace the bean hopper



5) Push the red locking slide all the way in



7) Refill the coffee bean hopper with fresh whole bean espresso coffee

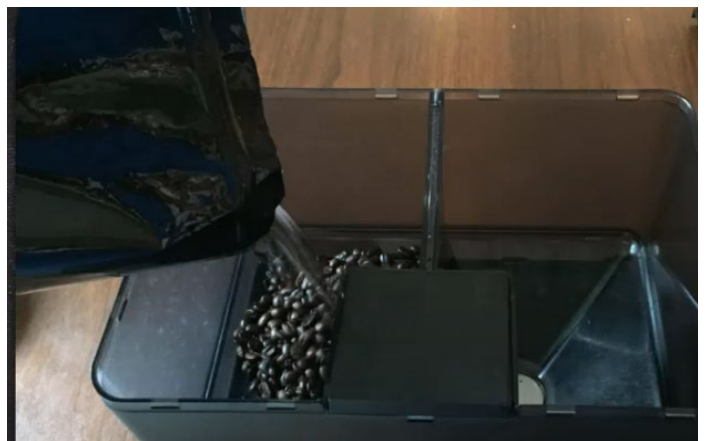

8) Wipe the outside of the dispenser with a clean, sanitizer-soaked towel.



END

Cleaner Cartridge Replacement Instructions - SB1200

FRANKE

- **Error 416 Cleaner Expired – cleaning agent in the pump module CleanMaster has expired. Insert a new cleaning agent cartridge.**

1) Remove cartridge by pulling straight out & discard the empty cartridge



2) Get a new Franke Milk System Cleaner Cartridge; unscrew and discard the plastic cap




3) **DO NOT** attempt to remove the protective seal on the outlet of the Franke milk system cleaner cartridge.



4) Insert the Franke Milk System Cleaner Cartridge by pushing straight all the way into the cartridge slot in the CleanMaster.




5) Firmly press the cartridge into position; the CleanMaster cleaner dispensing system will puncture the seal on the outlet of the cartridge

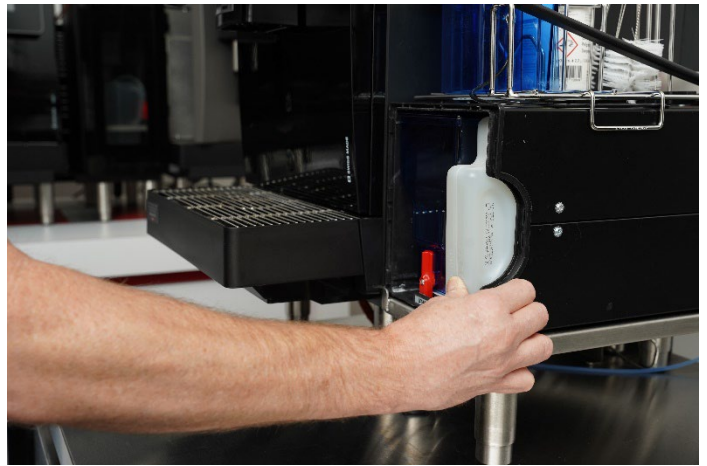

NOTE: DO NOT attempt to remove the cartridge prior to replacement.

Repeated removal / insertion may damage the seal on the cartridge and create an air leak which will prevent the CleanMaster system from dispensing the correct amount of milk system cleaner; this may cause errors related to the milk system cleaner cartridge being empty (e.g., Error 630 – Clean solution empty)

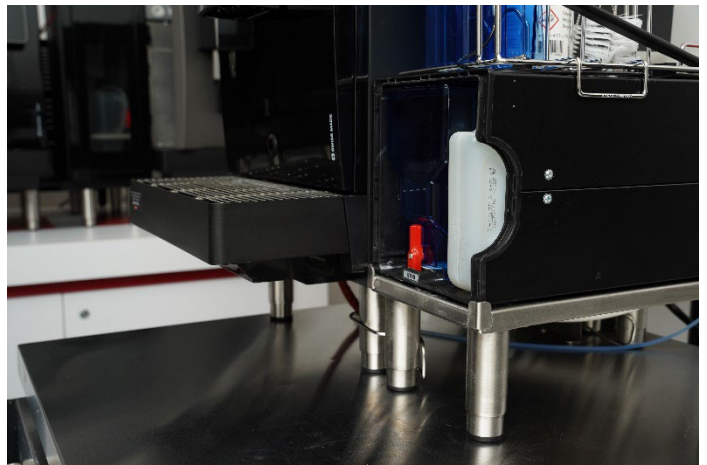

END

Cleaning the screen – Espresso Machine, SB1200

FRANKE

1) Tap the McCafe' logo at the top left of the screen.




2) Enter the PIN code 1111 and tap **OK**




3) Select Cleaning and Maintenance, then select Wipe Protection.

The user interface is locked for 20 seconds.

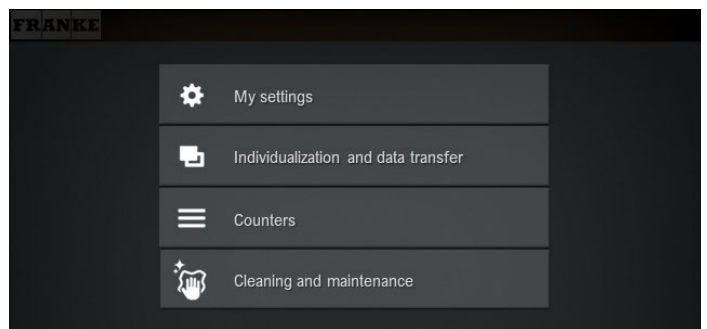

4) Clean the surface with a clean, sanitizer-soaked towel.

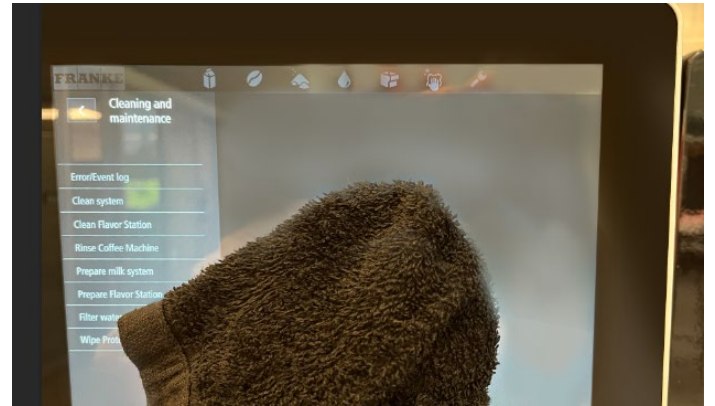

END